





20A Flex Outlet Plate



In creating the modern, aesthetically pleasing and ergonomic design of the CURVA range we did not lose sight of the need to produce a true value for money product offering the upmost appeal to installers and end users alike.

Only the best quality raw materials were used in producing this durable, attractive and modern range of accessories which will adorn the walls of all manner of buildings for years to come.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362 Website: www.scolmore.com





20A Flex Outlet Plate

Product Range

20A Flex Outlet Plate

CCA017

20A Flex Outlet Plate








CCA017 - Rear View

Product Wiring and Dimensional Drawings (mm)

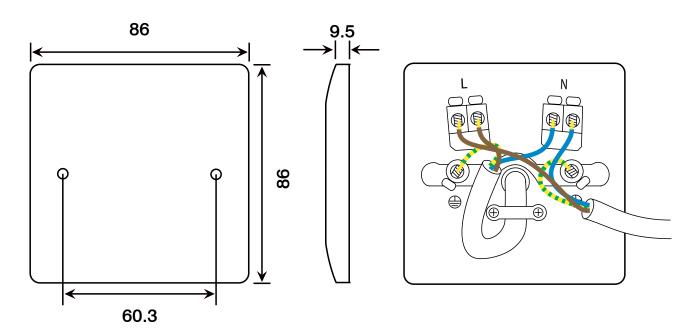

 ${\it Errors~\&~Omissions~excluded.~Specification~is~subject~to~change~without~notice.}$

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com





20A Flex Outlet Plate

Technical Specification	
20A Flex Outlet Plate	
Material Composition	Front Plate: Urea
	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated
Voltage	240V~ 50Hz
Current Rating	20A
Terminal Size	5mm ø
Torque Value	1.8Nm
Cable Size	4 x 2.5mm² or 1 x 6mm²
Outlet Diameter	10mm ø
Back Box Depth	16mm - 47mm
Warranty	10 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC
	BS 5733:2010
	Modified ISO 22196

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent

properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Facsimile: 01827 63362

Website: www.scolmore.com

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com



Scolmote

Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454 f: 01827 63362

e: sales@scolmore.com

w: www.scolmore.com

DECLARATION OF CONFORMITY

1. Issuer Name Scolmore International Limited

Issuer Address
 Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration Curva Range

a. Group 20A Flex Outlet Plate

b. Model No. CCA017

- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

BS 5733:2010+A1:2014

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed at, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

CE14







