





Power Socket Outlets



In creating the modern, aesthetically pleasing and ergonomic design of the CURVA range we did not lose sight of the need to produce a true value for money product offering the upmost appeal to installers and end users alike.

Only the best quality raw materials were used in producing this durable, attractive and modern range of accessories which will adorn the walls of all manner of buildings for years to come.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com





13A UK Socket Outlets

Product Range

13A UK Socket Outlets

CCA605 13A 1 Gang Switched Socket Outlet

CCA606 13A 2 Gang Switched Socket Outlet





CCA605 CCA606

Facsimile: 01827 63362


Website: www.scolmore.com






13A UK Socket Outlets

Product Dimensional Drawings (mm)

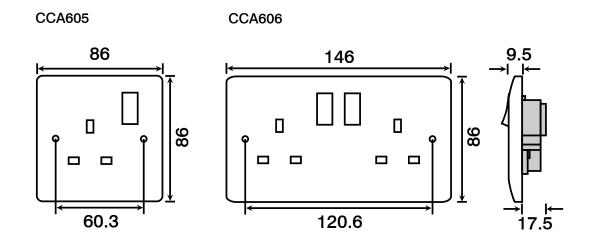

Product Wiring Diagram

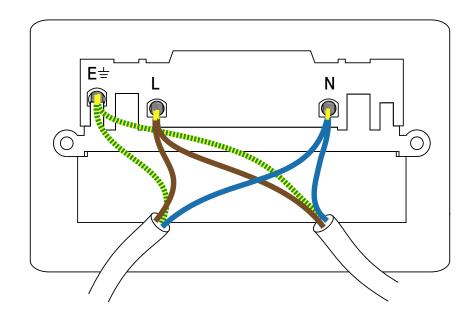

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com





13A UK Socket Outlets

Technical Specification	
13A UK Socket Outlets	
Material Composition	Front Plate, Rocker Switch & Rear Housing: Urea
	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated
	Internal Mechanism: Formed Press Brass
	Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	2.5Nm
Cable Size	4 x 2.5mm²
Back Box Depth	25mm - 47mm
Double Pole	No
Twin Earth	No
Warranty	10 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS 1363-2:1995+A4:2012
	Modified ISO 22196

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB



Scolmote

Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454 f: 01827 63362

e: sales@scolmore.com

w: www.scolmore.com

DECLARATION OF CONFORMITY

1. Issuer Name Scolmore International Limited

Issuer Address
 Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration Curva Range

a. Group Sockets

b. Model No. CCA605, CCA606

- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

BS 1363-2: 1995 + A4: 2012

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

CE13







