

10AX Switch Modules



The New Media Modules offer a flexible build solution to a host of individual power socket outlet requirements. The clip fit grid modules are simple to install in their blank mounting plates.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XBTelephone: 01827 63454Facsimile: 01827 63362E-mail: sales@scolmore.com, technical@scolmore.comWebsite: www.scolmore.com





Product Range

10AX Switch Modules

MM002**

MM025**

10AX 2 Way Switch Module 10AX Intermediate Switch Module




MM002WH



MM025BK

Product Dimensional Drawings (mm)

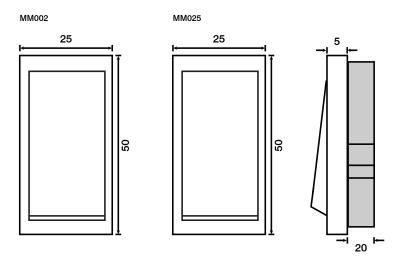

Errors & Omissions excluded. Specification is subject to change without notice. ** Denotes Module Colour

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB


Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com Facsimile: 01827 63362 Website: www.scolmore.com






Wiring Diagram

1 Way Switched Circuit



2 Way Switched Circuit

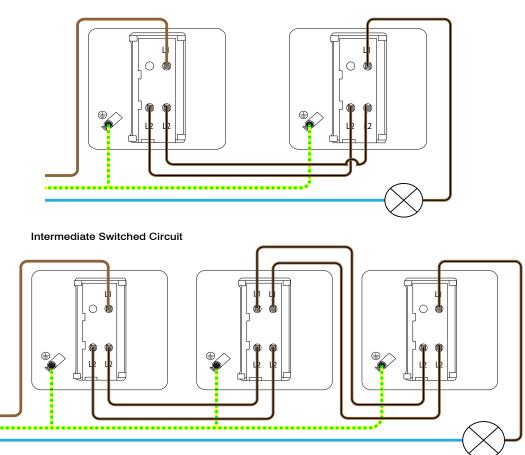

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB **Telephone:** 01827 63454 **Facsimile:** 01827 63362

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362 Website: www.scolmore.com





Technical Specification	
10AX Switch Modules	
Material Composition	Module: Polycarbonate
	Rear Housing: Nylon
	Terminal: Brass
	Terminal Screws: Steel & Yellow Passivated
Voltage	240V~ 50Hz
Current Rating	10AX (Suitable for Inductive Loads)
Terminal Size	5mm ø
Torque Value	1.2 Nm
Cable Size	4 x 1.5mm ^{2,} or 2 x 2.5mm ²
Back Box Depth	25mm - 47mm (Dependant on Mounting Plate Used)
Module Size	Single Width (25mm x 50mm)
Modular	Yes
Warranty	1 Year
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information

Standard Euro Module Size.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 E-mail: sales@scolmore.com, technical@scolmore.com Facsimile: 01827 63362 Website: www.scolmore.com





Scolmore International Ltd 1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454 f: 01827 63362 e: sales@scolmore.com w: www.scolmore.com

DECLARATION OF CONFORMITY

- 1. Issuer Name Scolmore International Limited
- 2. Issuer Address 1 Scolmore Park, Landsberg, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB
- 3. Object(s) of DeclarationNew Media Rangea. Group10AX Switch Modules
 - b. Model No. MM002, MM025
- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

EN 60669-1:1999 + A1:2002 + A2:2008

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

CE15



