

New Media USB Charging Outlet Module



The New Media Modules offer a flexible build solution to a host of individual power socket outlet requirements. The clip fit grid modules are simple to install in their blank mounting plates.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com





Product Range

New Media 2A USB Charging Outlet Module

MM515

2A USB Charging Outlet Module







MM515BK

Errors & Omissions excluded. Specification is subject to change without notice. MM515 is supplied with both Black & White Module Covers


Facsimile: 01827 63362

Website: www.scolmore.com






Product Dimensional Drawings (mm)



Wiring Diagram

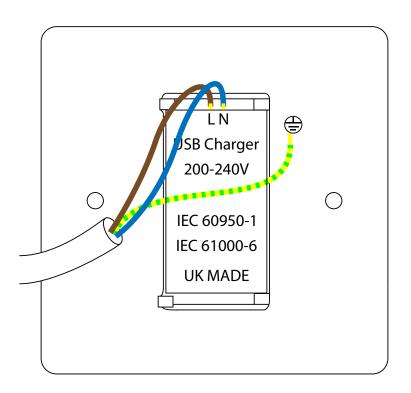

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362 Website: www.scolmore.com





Technical Specification	
New Media 2A USB Charging Outlet Module	
Material Composition	Module: Polycarbonate
Supply Voltage	240V~ 50Hz
Cable Size	1 x 1.0mm ^{2,} 2 x 1.5mm ² or 2 x 2.5mm ²
Current Rating	2 Amp
Supply Current (Full Load)	0.5A
Standby Current	2mA Single
Charging Output	5Vdc 5%, 2.0A per module
Output Connector	USB Type 'A'
Back Box Depth	35mm - 47mm
Module Size	Single Width (25mm x 50mm)
Modular	Yes
Warranty	1 Year Domestic
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	IEC 60950-1
	IEC 61000-6 1/3

Additional Information

Standard Euro Module Size. Overload Protection.

MM515 is internally fused, tested to withstand at least 8kV surges. It may therefore be connected directly to a standard ring main with the addition of a FCU.

It is normal for the front surface of the charger to become warm in use.

The MM515 module must be installed vertically.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB





Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454

f: 01827 63362

e: sales@scolmore.com w: www.scolmore.com

DECLARATION OF CONFORMITY

1. Issuer Name Scolmore International Limited

Issuer Address
Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration New Media Range

a. Group 2A USB Charging Outlet Module

b. Model No. MM515

- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

IEC 60950-1

IEC 61000-6-1 1/3

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

88 acts

Steven Bettson BSc - Senior Technical Support Engineer

CE15







