seera L





20AX 2 Way Plate Switches



Range of Simply Stylish Wiring Accessories

Designed to provide a competitive, cost effective equivalent range of white moulded accessories with a sleek, slim design creating a moden aesthetic.

Manufactured from Polycarbonate with reinforced interior plates to ensure every product is robust, strong, durable and UV stabilised so that signs of ageing is not a problem.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB


seera L'



20AX 2 Way Plate Switches

Product Range		
20AX Single Pole 2 Way Plate Switches		
CPC824-1	20AX 1 Gang SP 2 Way Plate Switch	
CPC824-2	20AX 2 Gang SP 2 Way Plate Switch	
CPC824-3	20AX 3 Gang SP 2 Way Plate Switch	







CPC824-1

CPC824-2

CPC824-3

Facsimile: 01827 63362


Website: www.scolmore.com






20AX 2 Way Plate Switches

Product Dimensional Drawings (mm)

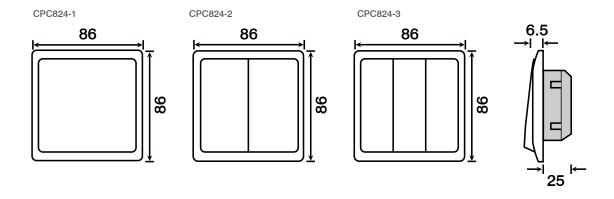

Product Wiring Diagram

2 Way Switched Circuit

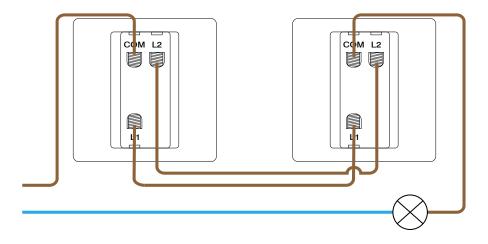

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB





20AX 2 Way Plate Switches

Technical Specification			
20AX Single Pole 2 Way Plate Switches			
Material Composition	Front Plate & Switch: Polycarbonate		
	Insert & Base: Polycarbonate		
	Terminals: Brass Plated Steel		
	Terminal Screws: Steel and Yellow Passivated		
	Internal Mechanism: Formed Press Brass		
	Silver "On-lay" Copper / Brass Contacts		
Voltage	250V~ 50Hz		
Current Rating	20AX (suitable for inductive loads)		
Terminal Screw	3.0mm ø		
Torque Value	0.8Nm		
Terminal Capacity	2 x 4mm²		
Fixing Centres	60.3mm		
Back Box Depth	35mm		
Warranty	10 Years Domestic		
Operational Temperature	-5° to +40°C		
Standards	The Low Voltage Directive 2014/35/EU		
	BS EN 60669-1: 1999 +A1: 2002 +A2: 2008		

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Facsimile: 01827 63362

Website: www.scolmore.com



Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454 f: 01827 63362

e: sales@scolmore.com

w: www.scolmore.com

seera

EU DECLARATION OF CONFORMITY

1. Issuer Name Scolmore International Limited

2. Issuer Address 1 Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration Seera Range

a. Group 20AX Plate Switches

b. *Model No.* CPC824-1, CPC824-2 & CPC824-3

4. The object of the declaration described above is in conformity with the requirements of the following Legislations:

The Low Voltage Directive 2014/35/EU

5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

BS EN 60669-1: 1999 +A1: 2002 +A2: 2008

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2015.

This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited

Karl Rawlins - Senior Technical Support Engineer







