## seera L





## **Universal Switched Socket Outlets**



Range of Simply Stylish Wiring Accessories

Designed to provide a competitive, cost effective equivalent range of white moulded accessories with a sleek, slim design creating a moden aesthetic.

Manufactured from Polycarbonate with reinforced interior plates to ensure every product is robust, strong, durable and UV stabilised so that signs of ageing is not a problem.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

## seera L'



## **Universal Switched Socket Outlets**

## **Product Range**

## **Universal Switched Socket Outlets**

CPC9835N 13A 1 Gang Switched Universal Socket Outlet

CPC9836N 13A 2 Gang Switched Universal Socket Outlet







CPC9836N

Facsimile: 01827 63362


Website: www.scolmore.com

# seera





## **Universal Switched Socket Outlets**

## Product Dimensional Drawings (mm)

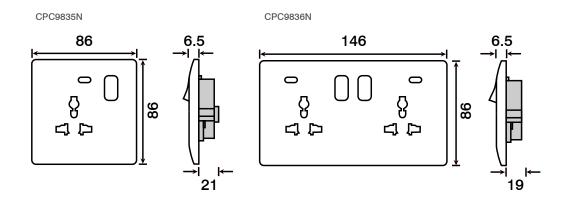

## **Product Wiring Diagram**





Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Facsimile: 01827 63362

Website: www.scolmore.com

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB





## **Universal Switched Socket Outlets**

## **Technical Specification**

#### **Universal Switched Socket Outlets**

Material Composition Front Plate, Switch & Neon Lens: Polycarbonate

Insert & Base: Polycarbonate Terminals: Brass Plated Steel

Terminal Screws: Steel & Yellow Passivated Internal Mechanism: Formed Press Brass Silver "On-lay" Copper / Brass Contacts

**Voltage** 250V~ 50Hz

Current Rating 13A

**Shuttered** Live & Neutral Pin Entries

Terminal Screw Size 4mm Ø
Torque Value 1.2Nm

**Cable Size** 4 x 2.5mm<sup>2</sup>, 2 x 4.0mm<sup>2</sup>

Fixing Centres 1 Gang: 60.3mm, 2 Gang: 120.6mm

Back Box Depth35mmNeon IndicatorYes

Warranty 10 Years

Operational Temperature -5° to +40°C

### **Plug Compatibility**

13A British Standard, 5A Round Pin, 2A Round Pin, 16A European Schuko, 2.5A European 2 Pin Flat, US 3 Pin, 10A Australian 3 Pin, 10A Chinese 3 Pin

## **Additional Information**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Facsimile: 01827 63362

Website: www.scolmore.com

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

**Telephone:** 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com



#### **Scolmore International Ltd**

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454

**f:** 01827 63362 **e:** sales@scolmore.com

w: www.scolmore.com



## **EU DECLARATION OF CONFORMITY**

1. Issuer Name Scolmore International Limited

2. Issuer Address 1 Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration Seera Range

a. *Group* Universal Switched Socket Outlets

b. *Model No.* CPC9835N & CPC9836N

- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.
- 6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2015.

This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited

Karl Rawlins - Senior Technical Support Engineer







